

## VERTICAL TURBINE DIESEL FIRE PUMP | 3000 GPM WITH 12×20 CAST IRON HEAD | SUBMITTAL

File No: F51.632

Date: JULY 15, 2013

Supersedes: F51.632

Date: AUGUST 15, 2005

Job:		Representative:					
		Order no.:	Date:				
Engineer:		Submitted by:	Date:				
		Approved by:	Date:				
Model: 12×18L VTF	Discharge head: 12×20 A	NOTES					
RPM: 1770 Water lube  3000 GPM:		driver adaptor is  Dimensions are  Engine to base m installed and plu  Engine oil & anti  Gear shipped fill  Refer dwg. no	driver adaptor is required.  • Dimensions are in inches unless otherwise indicated.				
DDESS DISCHARGE FLAN	IGE INCH (MM)						

NO OF	DISCHARGE SIZE	RATING	RAGD	AG*	В	С	н*	ı*	L	AA
STG'S	INCH (mm)		НР	ıncн (mm)						
2	12.00 (305)	125	200-300	34.00 (864)	54.00 (1372)	1.69 (43)	13.75 (349)	21.75 (553)	_	_
2	12.00 (305)	125	300	34.00 (864)	54.00 (1372)	1.94 (49)	13.75 (349)	21.75 (553)	_	_
2	12 00 (305)	125	350	36 00 (914)	54 00 (1372)	1 94 (49)	13 75 (349)	21 75 (553)	_	_

**Approved** 

1.94 (49)

DK

1.25

(32)

2.00

(51)

350-400 36.00 (914) 66.50 (1689)

250

RATE

125 #

250#

DC

17.00

(432)

17.75

(451)

DD

16.50

(419)

17.75

(451)

DF

12.00

(304)

12.00

(304)

 $\mathsf{D}\mathsf{G}$ 

1.00

(25)

1.25

(32)

DΑ

19.00


(483)

20.50

(521)

12.00 (305)

 $<sup>^{\</sup>star}\,$  Dimension based on randolph gear drive. May vary when driver adaptor is required.

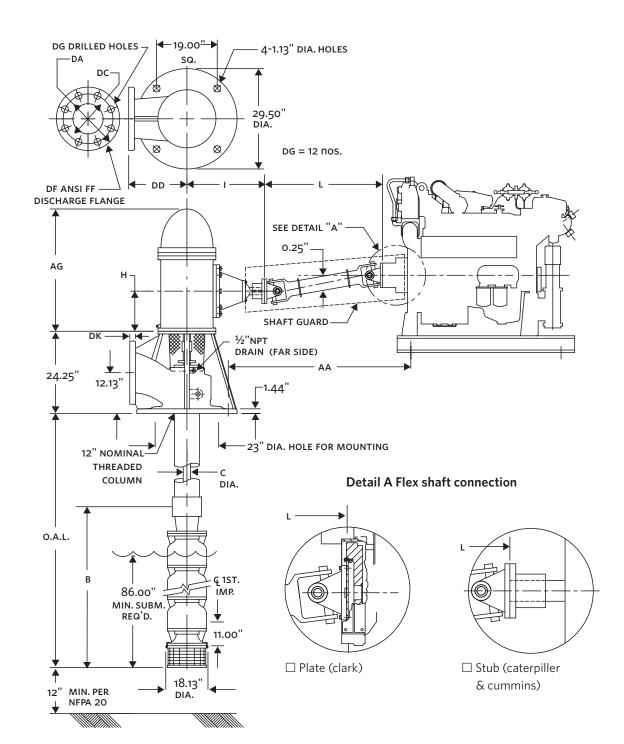

TORONTO

+1 416 755 2291

BUFFALO

+1 716 693 8813

BIRMINGHAM

+44 (0) 8444 145 145

MANCHESTER

+44 (0) 8444 145 145

BANGALORE

+91 (0) 80 4906 3555

SHANGHAI

+86 21 3756 6696

ARMSTRONG FLUID TECHNOLOGY ESTABLISHED 1934

ARMSTRONGFLUIDTECHNOLOGY.COM