

## 2500 gpm with 10 x 20 Fabricated Steel Head

## SUBMITTAL

VERTICAL TURBINE ELECTRIC  
FIRE PUMP



2500 G.P.M. \_\_\_\_\_ T.D.H.  
 FM  UL  NFPA-20 ONLY  
 APPROVAL  CONSTRUCTION

MODEL 10x16M VTF  
 10 x 20 "F" DISCHARGE HEAD  
 1770 R.P.M. WATER LUBE

MOTOR \_\_\_\_\_ HP \_\_\_\_\_  
 VOLT \_\_\_\_\_ PH \_\_\_\_\_ HZ \_\_\_\_\_  
 CONTROLLER MODEL \_\_\_\_\_

JOB NAME: \_\_\_\_\_  
 ITEM NO. \_\_\_\_\_


CUSTOMER \_\_\_\_\_

ORDER NO. \_\_\_\_\_  
 MFG. REP. \_\_\_\_\_

DWG. NO. \_\_\_\_\_  
 SERIAL NO. \_\_\_\_\_

NOT TO BE USED  
 FOR CONSTRUCTION  
 UNLESS CERTIFIED

By: \_\_\_\_\_ Date: \_\_\_\_\_

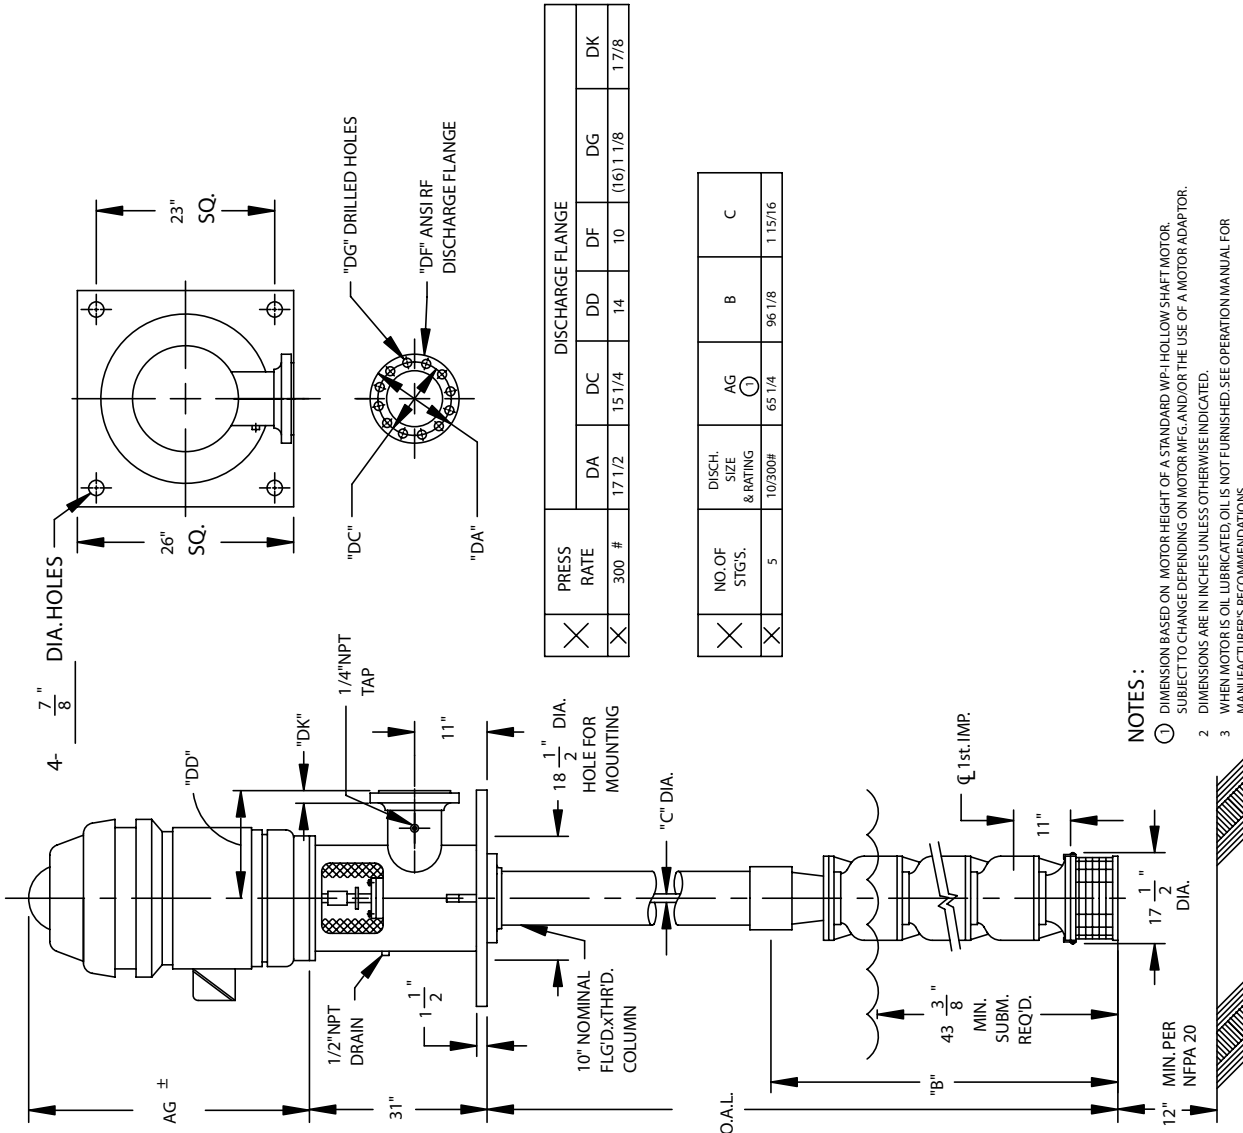

- NOTES:
- 1 DIMENSION BASED ON MOTOR HEIGHT OF A STANDARD WP-1 HOLLOW SHAFT MOTOR. SUBJECT TO CHANGE DEPENDING ON MOTOR MFG. AND/OR THE USE OF A MOTOR ADAPTOR.
  - 2 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE INDICATED.
  - 3 WHEN MOTOR IS OIL LUBRICATED OIL IS NOT FURNISHED. SEE OPERATION MANUAL FOR MANUFACTURER'S RECOMMENDATIONS.

FP-EF-07 (REV#3)